


NOTE:

- MATERIAL:**
 - INSULATOR: LCP+30% G.F. UL94 V-0;Black
 - CONTACT: C5191, 0.15t
 - SHELL: Stainless Steel, 0.3t
- ELECTRICAL CHARACTERISTICS:**
 - CONTACT RESISTANCE: 30mΩ Max Intial, 40mΩ Max fater 10000 cycles.
 - CURRENT RATING: 1.0A
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 100V R. M. S.
 - VOLTAGE RATING: 30V Max.
 - OPERATING TEMPERATURE: -25° C ~ 80° C
- MECHANICAL CHARACTERISTICS:**
 - MATING FORCE: 35N Max.
 - UNMATED FORCE: 10N Min. INITIAL; 8N AFTER 10000 cycles
 - DURABILITY: 5000 CYCLES min.
- FINISH:**
 - TERMINAL CONTACT: Gold Plated on contact area
Tin Platd on solder area
Ni Plated overall
 - SHELL: Ni Plated overall

RoHS Compliant

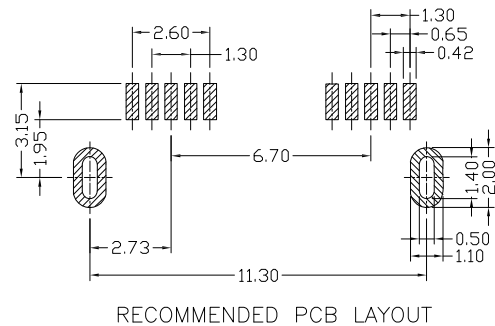

ORDER INFORMATION

SERIES NO.	73	B	R	R	Contact Plated	XX	Packaging	2	Shell Plated	D	Shell Leg	2	Shell Leg Width	P	Housing Color	B	Post	0	DIM A	X	Edge Curl	1	262
	Micro USB 3.0	B Type	P: Plug R: Receptacle	R: Right Angle	G1: Gold Flash G4: 15u" G5: 30u"	2: T&R	Stainless D: Nickel	2: 2 Straight	P: 11.3	B: Black LCP	0: w/o 1: with	1: 1.2 2: 0.85	0: w/o 1: with										

REV.	REVISION RECORD	DATE	General Tolerance		ARIBA TECHNOLOGY CO., LTD.	
A	Original	10/23/17"	LINEAR	0.0 ±0.35	ANGLE ±3°	
				0.00 ±0.20		
			UNIT:mm		TITLE: Micro USB 3.0 10P B Female	
			A4	NAME	DATE	SMT Right Angle DIP Shell 11.3W
			APPROVED	SUNNY		DWG.NO: 73BRRXX2D2PB0X1-262
			DESIGNER	TED		REV. A
			DRAWN	SNNATEN		SCALE 1:1 SHEET 1 OF 1