


NOTES:  
 Rated Current:1.75AMP  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:5000MΩ min  
 Operation Temperature:-55°C to +125°C

RoHS  
Compliant

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:LCP+30%G.F UL94V-0

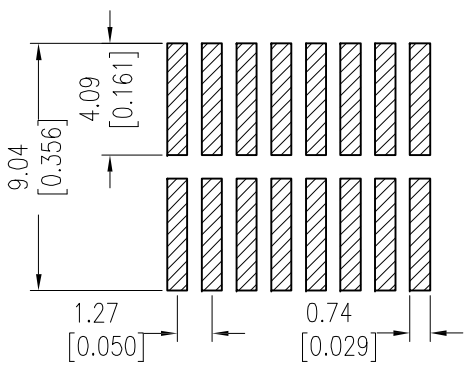

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)

Order Information:

B11D- XX V S X 2 0 X 0 X -131

1.27P Box Header Dual Rows series  
 Pin :06~50  
 Vertical SMT  
 2:Ejector with cap  
 Height 0:11.3  
 Color: B:Black  
 Packing: 1: Tube, 2:Tape&Reel, 3:Tape&Reel+Cap, 4:Tube+Cap  
 Plated: 0: w/o Post, 1:Gold Flash

REV.	REVISION RECORD	DATE	General Tolerances	
A	Original	02/10/15'	LINEAR 0.0 ±0.35 0.00±0.20	ANGLES ±3°
			UNIT: mm	
			A4	NAME DATE
			APPROVED	MARTIN
			DESIGNER	MERLIN
			DRAWN	ANGEL

TITLE: 1.27P Box Header SMT Vertical Dual Rows 11.3H Ejector Type	
DWG.NO.:B11D-XXVSX20X0X-131	REV. A
SCALE 1 : 1	SHEET 1 OF 1