
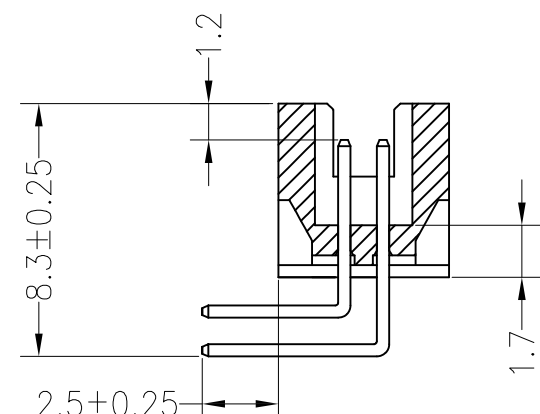


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

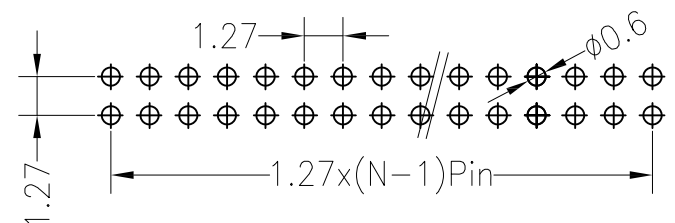

**SPECIFICATIONS**  
 Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C  
 Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material: PA6T (UL94V-0)  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

**ORDER INFORMATION**

Series NO.	PIN NO.	PIN Type	Mounting	Plated	Cap	Post	Color	Height	Packaging
B12D	XX	R	D	X	∅	∅	B	A	4
1.27P Box Header Dual Rows	Pin Per Row	R:Right Angle	D:DIP	0: Tin 1: G/F	0: w/o cap 1: w/ cap	0: w/o post 1: w/ post	B:Black	A: 5.6	4: Tray

REV.	REVISION RECORD	DATE	General Tolerance			ARIBA TECHNOLOGY CO., LTD.	
A	Original	06/27/18"	LINEAR	0.0 ±0.35	ANGLE ±3°	TITLE: 1.27mm Pitch Box Header DIP Right Angle Dual Rows 5.6H	
			UNIT:mm		DWG.NO: B12DXRXD00BA4-210		
			A4	NAME	DATE	REV. A	
			APPROVED	WAVE		SHEET 1 OF 1	
			DESIGNER	TED		SCALE 1:1	
			DRAWN	BOLNYU		SHEET 1 OF 1	