





Notes:
General Tolerance: ± 0.10
Unit: mm

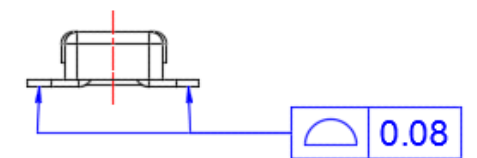

All Terminal And Solder
Coplanarity Is 0.08mm Max.

Dimension Table:

Positions	DIM A	DIM B	DIM C
10	3.80	1.60	3.20
12	4.20	2.00	3.60
14	4.60	2.40	4.00
16	5.00	2.80	4.40
18	5.40	3.20	4.80
20	5.80	3.60	5.20
22	6.20	4.00	5.60
24	6.60	4.40	6.00
26	7.00	4.80	6.40
28	7.40	5.20	6.80
30	7.80	5.60	7.20
32	8.20	6.00	7.60
34	8.60	6.40	8.00
36	9.00	6.80	8.40
38	9.40	7.20	8.80
40	9.80	7.60	9.20
50	11.80	9.60	11.20
60	13.80	11.60	13.20
70	15.80	13.60	15.20
80	17.80	15.60	17.20

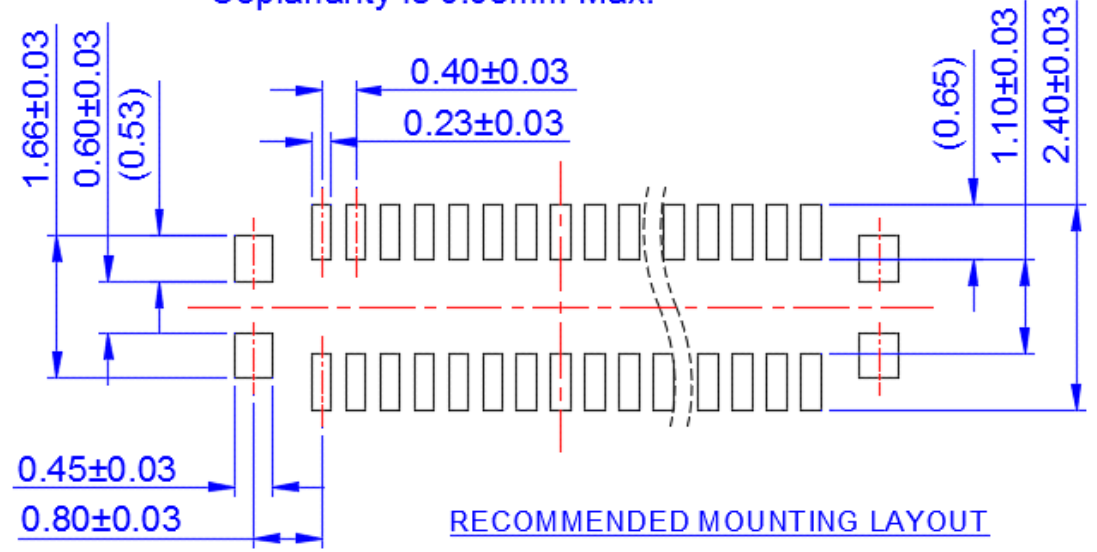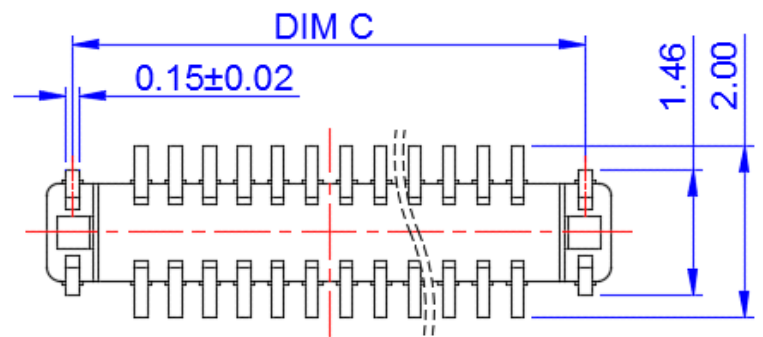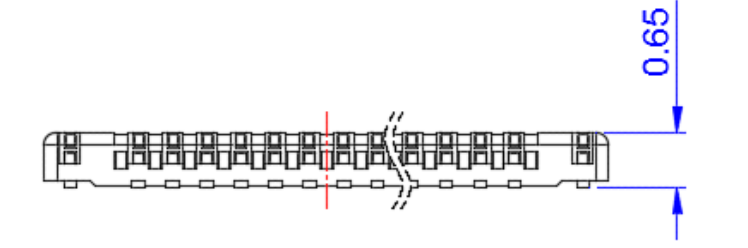

RECOMMENDED MOUNTING LAYOUT

MATERIAL:

- HOUSING:LCP Black
- CONTACT:Phosphor Bronze,Gold 3u" Plated
- Pad:Phosphor Bronze, Tin Plated

RoHS
Compliant

ORDER INFORMATION

BS04- 2XX F 0 1-41

0.4P Board to Board
Single Slot

2 Rows

XX:Total Pin

F:FEMALE

Housing Material
1:LCP

0:w/o Post
1:w/ Post

REV.	REVISION RECORD	DATE	General Tolerance	
A	Original	01/07/19"	LINEAR 0.0 ± 0.35 0.00 ± 0.20	ANGLE $\pm 3^\circ$
			UNIT:mm	
			A4	NAME
			APPROVED	SUNNY
			DESIGNER	TED
			DRAWN	HERFON



TITLE: 0.4P Board to Board Female
SMT Right Angle 0.65H Matting 0.8H

DWG.NO: BS042XXF01-41 REV. A

SCALE 1 : 1 SHEET 1 OF 1