
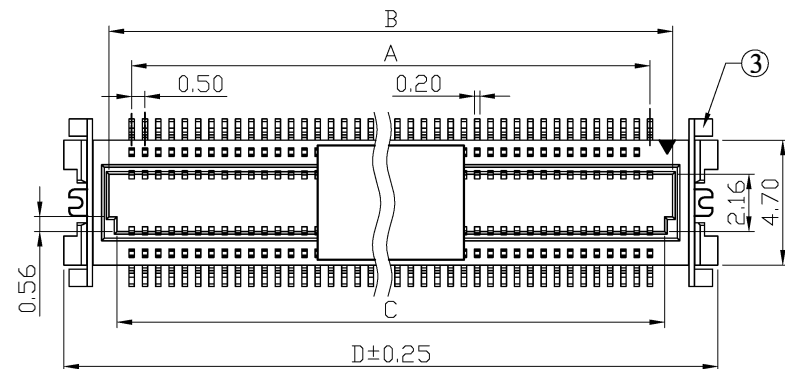


LTR	Part Name	Material	Description	QTY
1	Housing	NY-46 UL94V-0	+40%GF Initial : 1000M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2
4	CAP	LCP	—	1
Temperature Rating : -40°C ~ +105°C . Dielectric Withstanding Voltage : 300 V AC/Min				

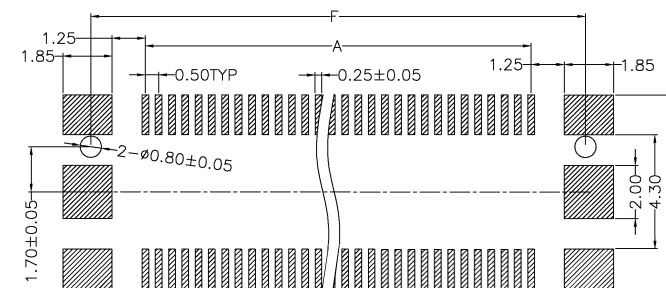

PC BOARD LAYOUT

Circuit No.	Dimensions					
	A	B (A+1.7)	C (A+1.1)	D (A+5.1)	E (A+2.5)	F (A+4.1)
2*10P	4.50	6.20	5.60	9.60	6.75	8.60
2*15P	7.00	8.70	8.10	12.10	9.25	11.10
2*20P	9.50	11.20	10.60	14.60	11.75	13.60
2*30P	14.50	16.20	15.60	19.60	16.75	18.60
2*40P	19.50	21.20	20.60	24.60	21.75	23.60

ORDER INFORMATION

BS05- 2XX F 1 4-229

RoHS
Compliant

0.5P Board to Board
Single Slot

2 Rows

XX:Per Row Pin

F:FEMALE

Housing Material
4: NY46

0:w/o Post
1:w/ Post

REV.	REVISION RECORD	DATE
A	Original	10/28/16

General Tolerances		
LINEAR	0.0 ±0.35 0.00±0.20	ANGLES ±3°
APPROVED	WENDY	DATE
DESIGNER	WHITE	
DRAWN	ANGEL	

ARIBA
TECHNOLOGY CO., LTD.

TITLE: 0.5P Board to Board Female
SMT Vertical 0.9H Matting 2.5H

DWG.NO.	BS05-2XXF14-229	REV.	A
SCALE	1 : 1	SHEET	1 OF 1