
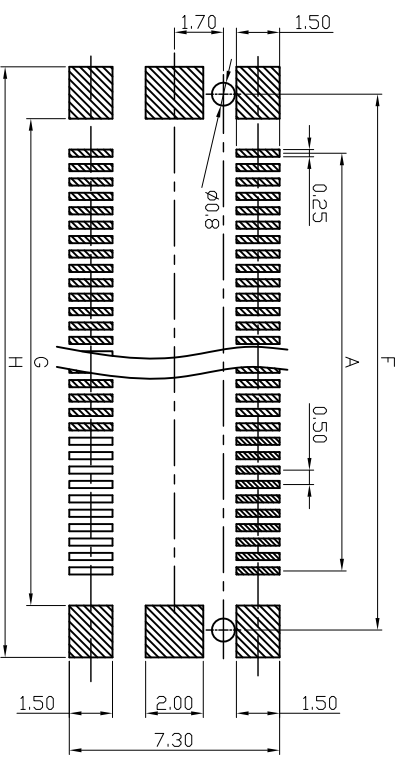


LTR	Part Name	Material	Description	QTY
1	Housing	LCP UL94V-0	+30%GF 260°C for 10 Seconds. Initial : 1000M Ohms Min.	1
2	Contact	Bronze CS191	Current Rating : 0.5 A Initial : 30m Ohms Max.	XX
3	Fitting Nail	Brass C2680	Current Rating : 0.5 A Initial : 30m Ohms Max.	2

Temperature Rating : -40°C ~ +105°C.  
Dielectric Withstanding Voltage : 300 V AC/Min

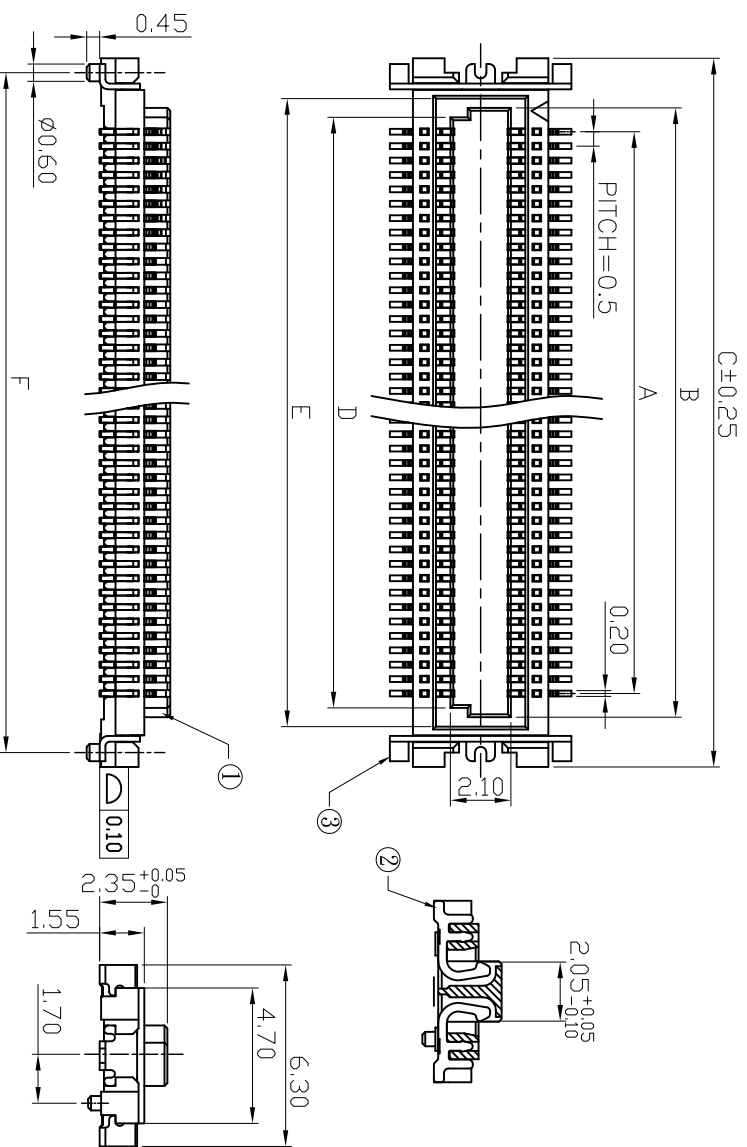

Circuit No.	Dimensions							
	A	B (A+1.65)	C (A+5.1)	D (A+1.0)	E (A+2.3)	F (A+4.1)	G (A+2.4)	H (A+6.0)
2*5P	2.00	3.65	7.10	3.00	4.30	6.10	4.40	8.00
2*10P	4.50	6.15	9.60	5.50	6.80	8.60	6.90	10.50
2*30P	14.50	16.15	19.60	15.50	16.80	18.60	16.90	20.50
2*40P	19.50	21.15	24.60	20.50	21.80	23.60	21.90	25.50

**ORDER INFORMATION**

**BS05- 2XX M 1 5-229**

**RoHS Compliant**

- 0.5P Board to Board Single Slot
- 2 Rows
- XX:Per Row Pin
- Housing Material
- 5:LCP
- 0:w/o Post
- 1:w/ Post
- M:MALE

REV.	REVISION RECORD	DATE	General Tolerances		UNIT: mm		TITLE:	
A	Original	06/06/16	LINEAR 0.0 ±0.35	ANGLES ±3°	A4	NAME WENDY	DATE	0.5P Board to Board Male
			0.00±0.20		APPROVED	DESIGNER		SMT Vertical 1.55H Matting 3.0H
					DRAWN	ANGEL		DWG.NO. BS05-2XXM15-229
								SCALE 1 : 1 SHEET 1 OF 1

