


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H


A  
B  
C  
D  
E  
F  
G  
H

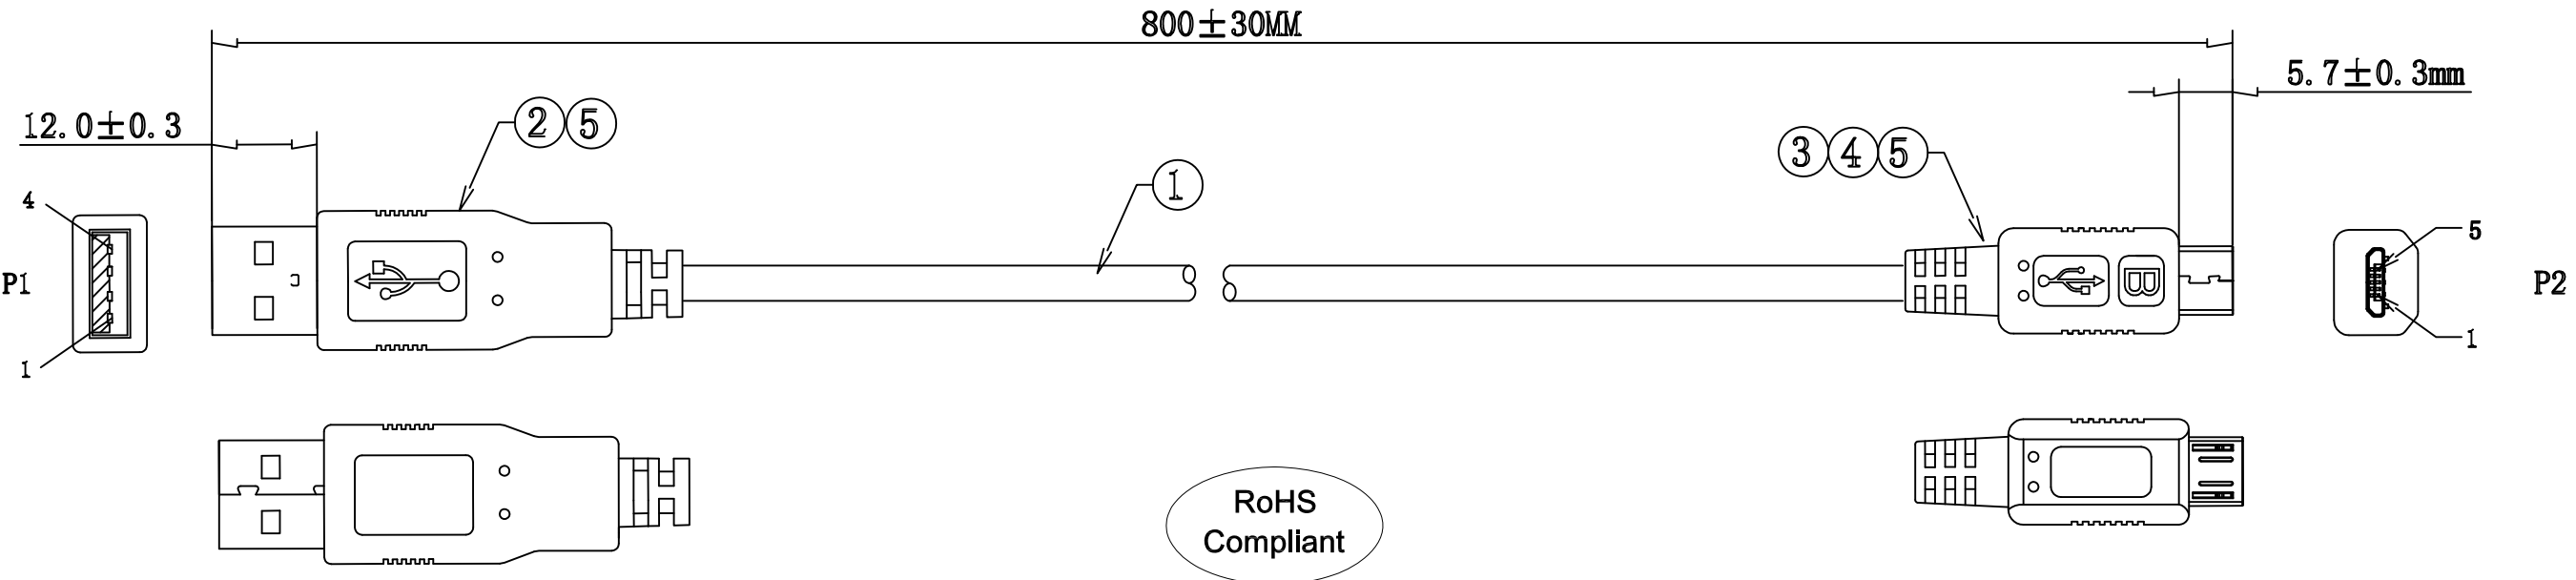

RoHS  
Compliant

PIN OUT

P1		P2
1	Red	1
2	White	2
3	Green	3
4	Black	3
	Braid+Drain	5
SHEII		SHEII

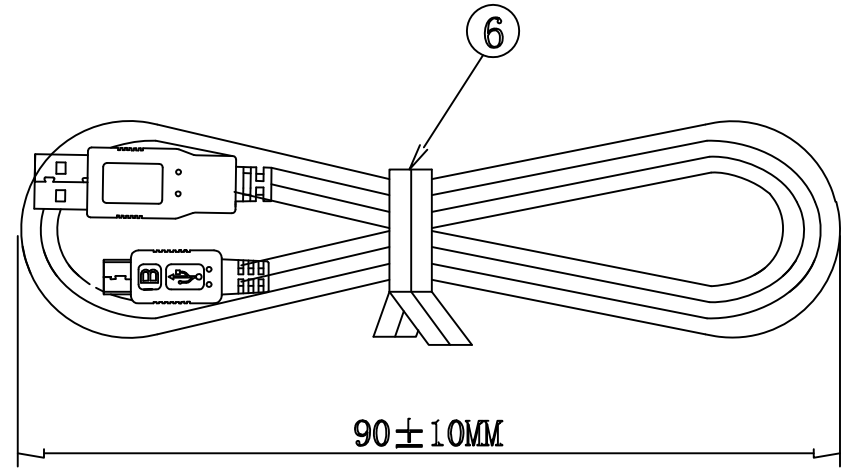

Testing Condition:  
 1.100% TEST(Open, Short, Miss wire)  
 2.Contact Resistance:2Ω MAX.  
 3.Insulate Resistance:10mΩ MIN.

NO	DESCRIPTION	Q' TY	UNIT
6	Cable Tie(0.9*1.7MM) L=90MM	1	PC
5	45P Black PVC	12	G
4	LDPE	6	G
3	Micro USB(B)M Solder insulatio:White shell nickel plated	1	PC
2	USB(A)M Solder insulatio:White shell nickel plated	1	PC
1	33AWG(13/0.05TC)*2C+27AWG(21/0.08TC)*2C+AL+E(33/0.08TC)+B(50%TC)+PVC OD:3.0 Jacket color:Black	0.8	M

ORDER INFORMATION

CU2AMFM E B C -276

USB 2.0 AM TO  
Micro USB 2.0  
BM Cable

Cable Length  
E:800mm

Cable Color  
B: Black

Cable O.D.  
C:3.0

REV.	REVISION RECORD	DATE	General Tolerance	ARIBA TECHNOLOGY CO., LTD.	
A	Original	12/19/18"	LINEAR 0.0 ±0.35 0.00 ±0.20	ANGLE ±3°	TITLE: USB Type 2.0 A Male & Micro USB 2.0 B Male Cable 800L Ø3.0
			UNIT:mm		
			A4	NAME	DATE
			APPROVED	EVAN	
			DESIGNER	TED	
			DRAWN	HILRN	
			SCALE	1 : 1	SHEET 1 OF 1

1 2 3 4 5 6 7 8