




Electrical Test:

- 1. 100%Test(Open ,short ,miss wire)
- 2. Contact Resistance: 2 ohm max.
- 3. Insulation Resistance: 10M ohm min.

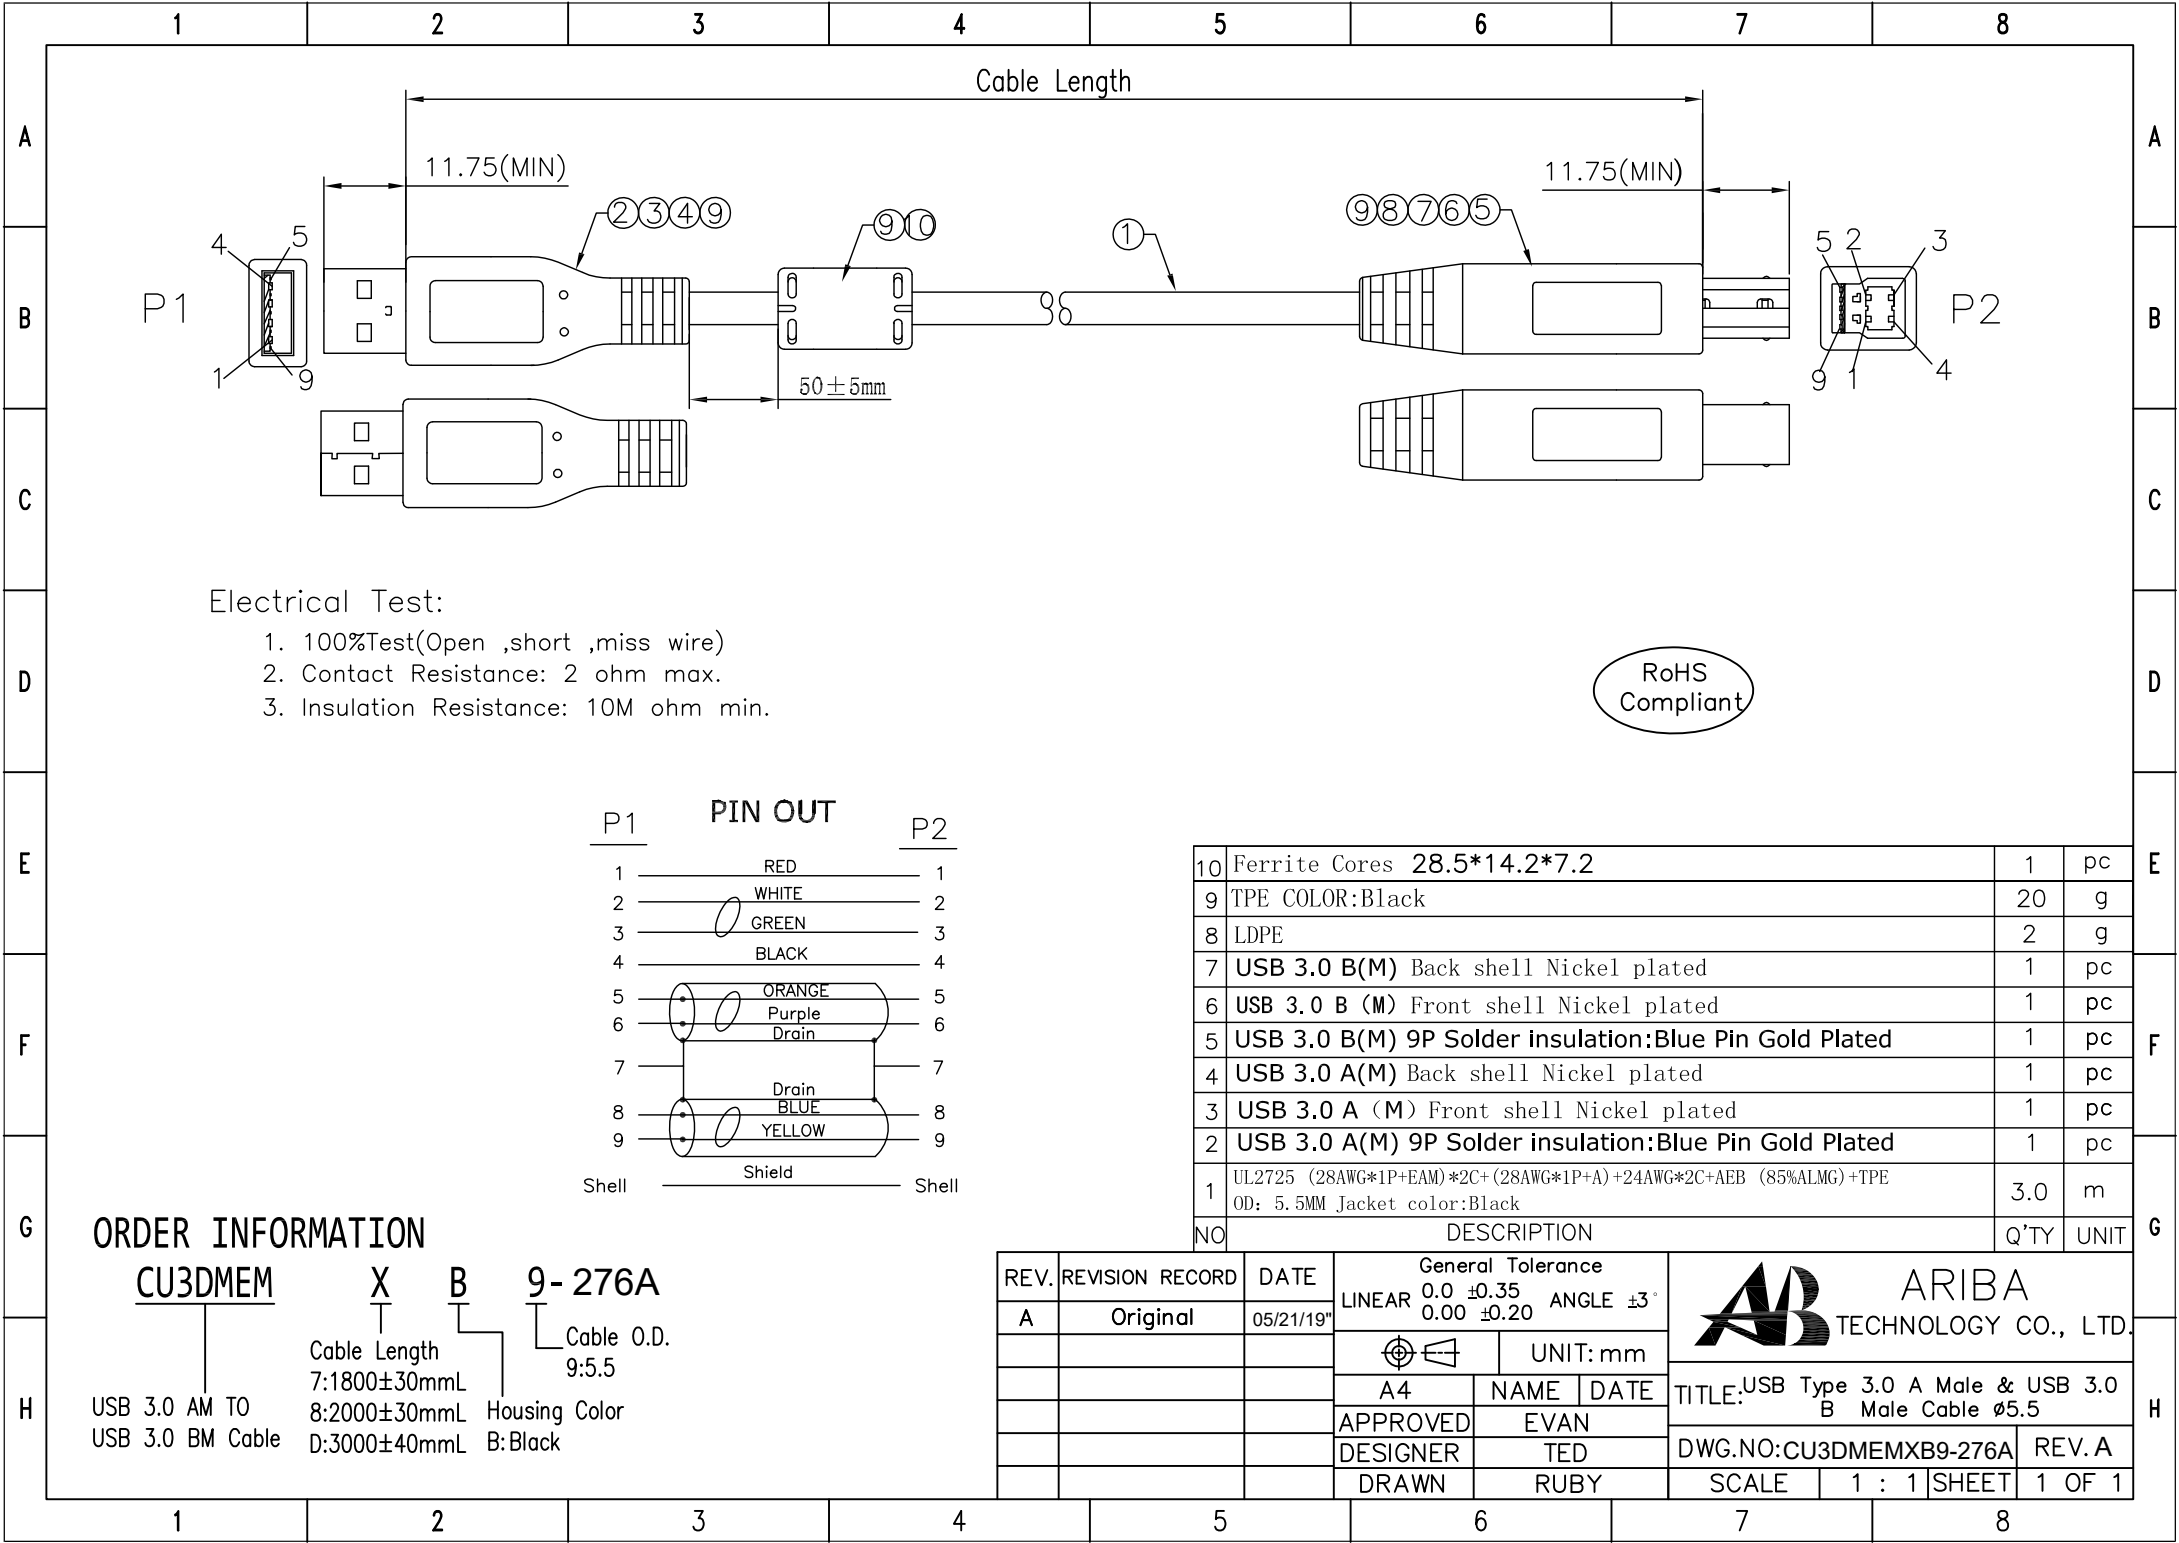

P1	PIN OUT	P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	ORANGE	5
6	Purple	6
7	Drain	7
8	BLUE	8
9	YELLOW	9
Shell	Shield	Shell

10	Ferrite Cores 28.5*14.2*7.2	1	pc
9	TPE COLOR:Black	20	g
8	LDPE	2	g
7	USB 3.0 B(M) Back shell Nickel plated	1	pc
6	USB 3.0 B (M) Front shell Nickel plated	1	pc
5	USB 3.0 B(M) 9P Solder insulation:Blue Pin Gold Plated	1	pc
4	USB 3.0 A(M) Back shell Nickel plated	1	pc
3	USB 3.0 A (M) Front shell Nickel plated	1	pc
2	USB 3.0 A(M) 9P Solder insulation:Blue Pin Gold Plated	1	pc
1	UL2725 (28AWG*1P+EAM)*2C+(28AWG*1P+A)+24AWG*2C+AEB (85%ALMG)+TPE OD: 5.5MM Jacket color:Black	3.0	m
NO	DESCRIPTION	Q'TY	UNIT

ORDER INFORMATION

CU3DMEM X B 9-276A

USB 3.0 AM TO
USB 3.0 BM Cable

Cable Length
7:1800±30mmL
8:2000±30mmL
D:3000±40mmL

Housing Color
B:Black

Cable O.D.
9:5.5

REV.	REVISION RECORD	DATE	General Tolerance			 ARIBA TECHNOLOGY CO., LTD.					
A	Original	05/21/19"	LINEAR	0.0 ±0.35 0.00 ±0.20	ANGLE ±3°						
					UNIT: mm		TITLE:USB Type 3.0 A Male & USB 3.0 B Male Cable ø5.5				
			A4	NAME	DATE						
			APPROVED		EVAN		DWG.NO:CU3DMEMXB9-276A			REV. A	
			DESIGNER		TED						
			DRAWN		RUBY		SCALE		1 : 1	SHEET	1 OF 1