
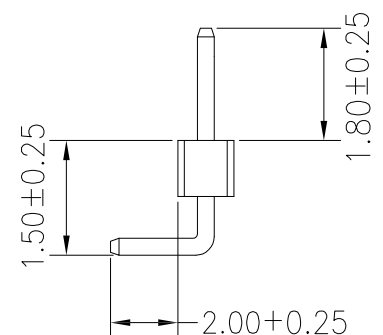


SPECIFICATIONS

Current Rate:0.75 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:30mΩ Max.
 Withstand Voltage: 500V AC/DC
 Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:PA6T, UL94V-0
 Terminal: Brass

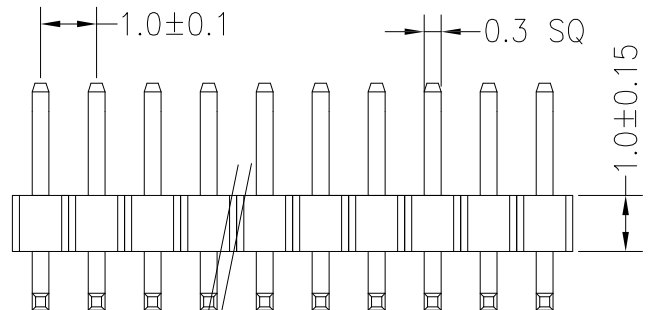


RoHS
Compliant

ORDER INFORMATION

Series NO.	PIN NO.	PIN Type	Mounting	Plated	Cap	Post	Material/Color	Height	Pin Type
P11S1	XX	R	D	X	0	0	T	1	N -210
1.0P Pin Header Single Row Single Layer	Pin Per Row	R:Right Angle V:Vertical	D:DIP S:SMT	0: Tin 1:Gold Flash	0:w/o cap 1:w/ cap	0:w/o post 1:w/ post	T:Nylon 6T Black	1:1.0	N:2.0x1.8

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

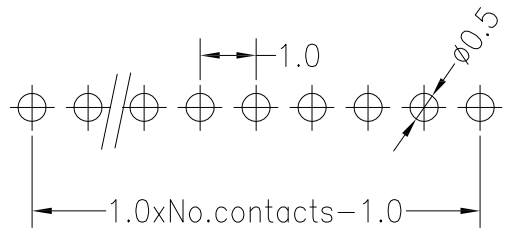

REV.	REVISION RECORD	DATE	General Tolerance		ARIBA TECHNOLOGY CO., LTD.	
A	Original	11/02/17"	LINEAR	0.0 ±0.35 0.00 ±0.20	ANGLE ±3°	
			UNIT:mm		TITLE: 1.0mm Pitch Pin Header DIP RA Single Rows Single Layer 1.0H	
			A4	NAME	DATE	DWG.NO: P11S1XXRDX00T1N-210
			APPROVED	SUNNY		REV. A
			DESIGNER	TED		
			DRAWN	BOLNYU		SCALE 1:1 SHEET 1 OF 1